

FrameTX[®] and FrameTX[®] Thermo

Breathable Membrane Installation Instructions

FrameTX[®] breather membranes are high performance vapour permeable membranes intended for walling applications only.

FrameTX[®] breather membranes are:

- water resistant and will prevent any penetrating water passing to the timber or steel structure, and
- vapour permeable allowing water vapour, which permeates into the wall construction from inside, to diffuse safely into the wall cavity where it will be removed by air movement or condense and drain safely away.

In accordance with requirements to reduce the risk of condensation an effective air and vapour control layer must be utilised on the warm side of the insulation layer.

FrameTX[®]Thermo has a reflective aluminium surface, specifically designed to enhance the thermal performance of timber & steel frame structures.

General Installation Information

Insitu fixing to timber frame

Generally:

The membrane must be installed in accordance with these instructions and in accordance with the recommendations given in NHBC Standards, where appropriate.

The membrane can be damaged by high winds, prolonged exposure to UV, careless handling or by vandalism and must be covered as soon as practically possible on completion of installation. Any damaged areas should be repaired or replaced before completion.

Procedure:

Unroll the membrane and fit directly to the timber sheathing ensuring that the lower base timbers are covered. FrameTX[®]Thermo should be installed with the reflective face to the outside. Ensure that the vertical joints of the membrane are staggered.

To assist in the subsequent location of the vertical studs these should be highlighted on the membrane.

To prevent damage by wind action the membrane should be fixed at regular intervals not exceeding 500mm vertically and 1.0m horizontally, using austenitic stainless steel nails or staples.

Lap the membrane by 100mm horizontally and 150mm vertically and at external corners return the membrane by 300mm, see Figure 1.

Upper layers should overlap lower layers to shed water away from the sheathing and below the level of the lowest timber. It is essential that the lowest timber members are protected by the membrane.

At openings the membrane should be detailed into the opening return to ensure there is sufficient lap and weathering with the proposed framing.

At cavity barriers and trays the membrane should be lapped by at least 100mm horizontally and 150mm vertically.

Insitu fixing to steel frame

Generally:

In steel framed construction the membrane will typically be laid directly onto insulation. The membrane is compatible with all mineral and plastics insulants.

The membrane can be damaged by high winds, prolonged exposure to UV, careless handling or by vandalism and must be covered as soon as practically possible on completion of installation. Any damaged areas should be repaired or replaced before completion.


Procedure:

Unroll the membrane and fix directly to the steel framing or substrate with the reflective face to the outside. Ensure that the lower base steel members are covered and that the vertical joints of the membrane are staggered.

To assist in the subsequent location of the vertical studs these should be highlighted on the membrane.

To prevent damage by wind action the membrane should be fixed at regular intervals not exceeding 500mm vertically and 1.0m horizontally

Figure 1 - Lapping of FrameTX[®]

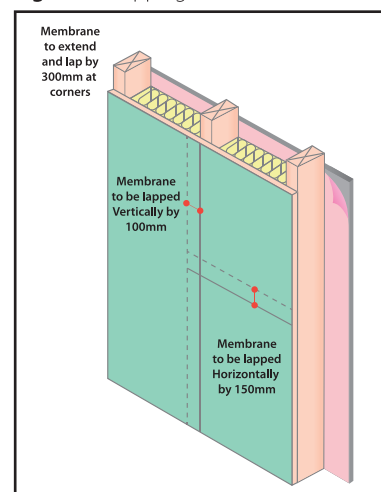

Lap the membrane by 100mm horizontally and 150mm vertically and at external corners return the membrane by 300mm, see Figure 1.

Where the vertical membrane adjoins a low pitched metal profiled roof, the membrane should be taken up over the wall head and lapped 300mm below the roofing underlay to ensure continuity.

Repair

Any tears or damage to the membrane can be repaired prior to the installation of the external walls or claddings by laying another sheet over the damaged area and sealing it correctly, ensuring water is shed away from the sheathing.

Transport and Site Storage

The membrane is delivered to site in rolls individually wrapped in polyethylene. Rolls should be kept wrapped until required, stored on their side, on a smooth, clean surface, under cover in a cool, dry environment and protected from sunlight.

Health and Safety

Care should be taken in handling materials at height in particular ensure that manual handling regulations are not exceeded. Before work commences a method statement and risk assessment requires to be prepared.

Standards and Guidance

The membrane conforms to the Construction Products Regulation (EU Regulation No. 305/2011), Underlay for walls (Annex ZA of EN 13859-2) and is manufactured under control of an ISO 9001 quality management system.

Resistance to moisture and weather: The appropriate national requirements require that walls should resist the penetration of rain from outside. The properties of the membrane ensure that, when installed as recommended, a wall will comply with the following regulations:

Approved Document C, Section 5 (England);

Approved Document C, Section 5 (Wales (E&W));

Scottish Technical Handbook 3, Section 3.10 (Domestic and Non-domestic);

Technical Booklet C, Section 6 (Northern Ireland), and

Technical Guidance Document C, Section 3.2 (Southern Ireland)

Condensation: BS 5250, British Standard Code of Practice for control of condensation in buildings, is the primary reference for the installation of membranes in walls and roofs. It is referenced extensively within the building regulations as follows:

Approved Document C, Section 5 (England);

Approved Document C, Section 5 (Wales (E&W));

Scottish Technical Handbook 3, Section 3.15 (Domestic and Non-domestic);

Technical Booklet C, Section 8 (Northern Ireland), and

Technical Guidance Document F, Section 1 (Southern Ireland)

Conservation of fuel and power: The appropriate national requirements require that walls should be designed and constructed in such a way that an insulation envelope is provided which reduces heat loss. The properties of the membrane ensure that, when installed as recommended, a wall will comply with the following regulations:

Approved Document L1A; L1B; L2A and L2B (England);

Approved Document L1A; L1B; L2A and L2B (Wales (E&W));

Scottish Technical Handbook 6, Section 6.2 (Domestic and Non-domestic);

Technical Booklet F1 and F2 (Northern Ireland), and

Technical Guidance Document L, (Southern Ireland)

The standards set by the NHBC and the guidance for the construction of timber framed houses issued by TRADA, both specify the inclusion of a vapour permeable or breather membrane outside the sheathing of timber framed walls.

Don & Low believes that the information provided herein is accurate as at the date of publication. The information does not form part of any contract. Don & Low reserves the right to change specifications or other product information. Don & Low accepts no responsibility or liability for information provided by third parties. No warranties, express or implied, are offered regarding the suitability of any product for your use, as site conditions and customer requirements vary. Should you require further information, please contact us. Products are sold subject to the seller's terms and conditions of sale. No warranty or immunity is offered against infringement of patents or other intellectual property rights.

© Don & Low Limited, 2016. The intellectual property in the products is owned and protected by Don & Low or its licensors.