






Air and Vapour Control Layer

- To be installed on the internal (warm) side of the installation
- Forms a barrier against air leakage and water vapour transfer
- Can be used in a range of construction applications including walls, ceilings, floors, pitched roofing and low sloping metal roofing
- Fabric weight: 146g/m²

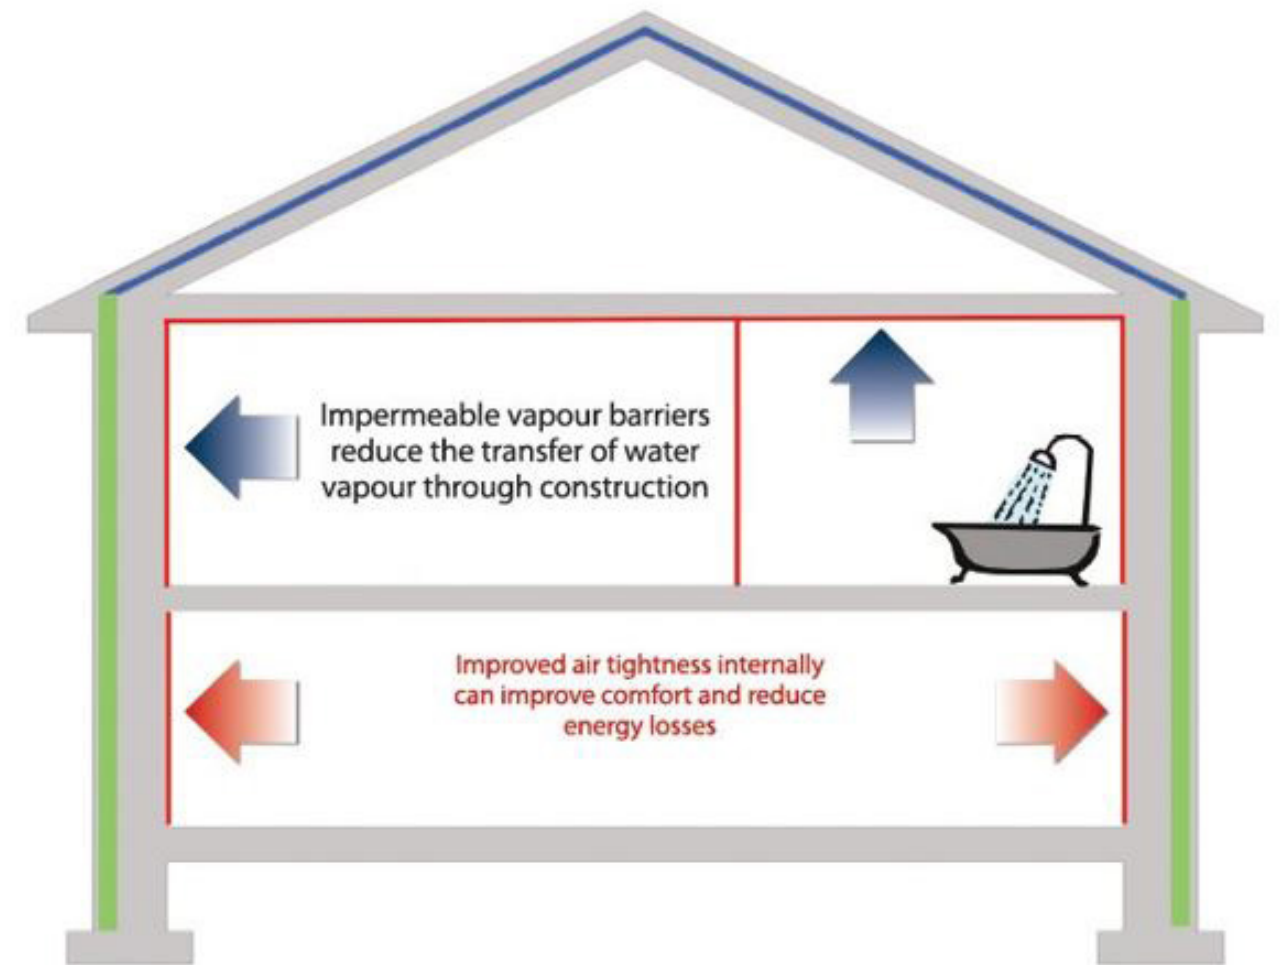

Installation Guidelines
www.donlow.co.uk/install

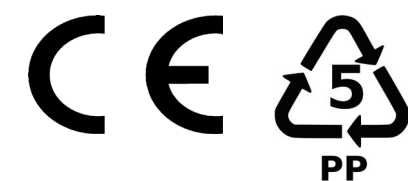

Don & Low Ltd
Newfordpark House Glamis Road Forfar Angus DD8 1FR Scotland UK
t +44 (0)1307 452200 f +44 (0)1307 452300 e enquiries@donlow.co.uk www.donlow.co.uk

Code: 942
Issue 05
February 2019