


# VapourTX<sup>®</sup>

## 116 VCL CONSEAL




### Air and Vapour Control Layer

- To be installed on the internal (warm) side of the installation
- Forms a barrier against air leakage and water vapour transfer
- It is used in a range of construction applications, including walls, ceilings, floors, pitched roofing and low-sloping metal roofing.
- Fabric weight: 116g/m<sup>2</sup>
- Conseal Integral Tape for sealing laps, reducing air infiltration and convective heat loss
- Integral Tape allows ease of use with pressure-sensitive adhesive giving excellent adhesion and quick hold.

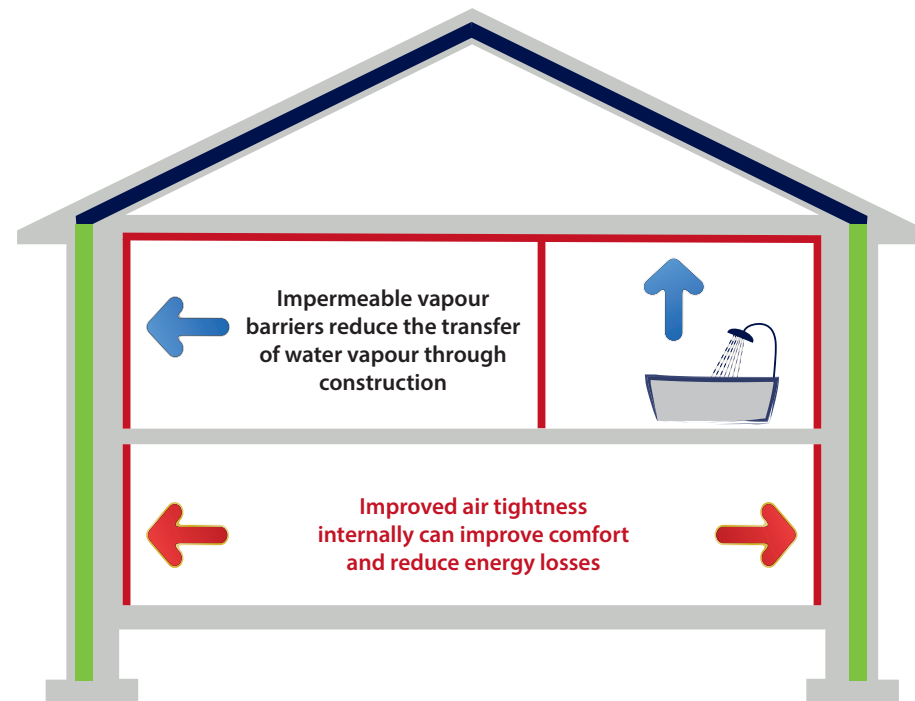

Installation Guidelines  
[www.donlow.co.uk/install](http://www.donlow.co.uk/install)



5 060098 740948 >



Don & Low Ltd, Glamis Road, Forfar, Angus, DD8 1FR, Scotland, UK  
Sales Tel: +44(0)1307 452200 email: [enquiries@donlow.co.uk](mailto:enquiries@donlow.co.uk)  
Technical Tel: 0808 169 4444 email: [membranes@donlow.co.uk](mailto:membranes@donlow.co.uk) • [www.donlow.co.uk](http://www.donlow.co.uk)



Code: 969  
Issue 03  
September 2024