



VapourTX[®]

116 VCL CONSEAL

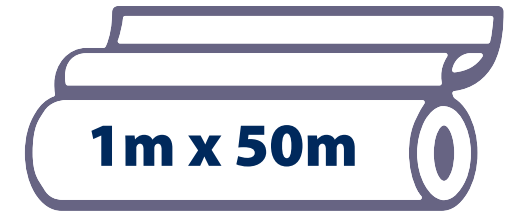


Air and Vapour Control Layer

- To be installed on the internal (warm) side of the installation
- Forms a barrier against air leakage and water vapour transfer
- It is used in a range of construction applications, including walls, ceilings, floors, pitched roofing and low-sloping metal roofing.
- Fabric weight: 116g/m²
- Conseal Integral Tape for sealing laps, reducing air infiltration and convective heat loss
- Integral Tape allows ease of use with pressure-sensitive adhesive giving excellent adhesion and quick hold.

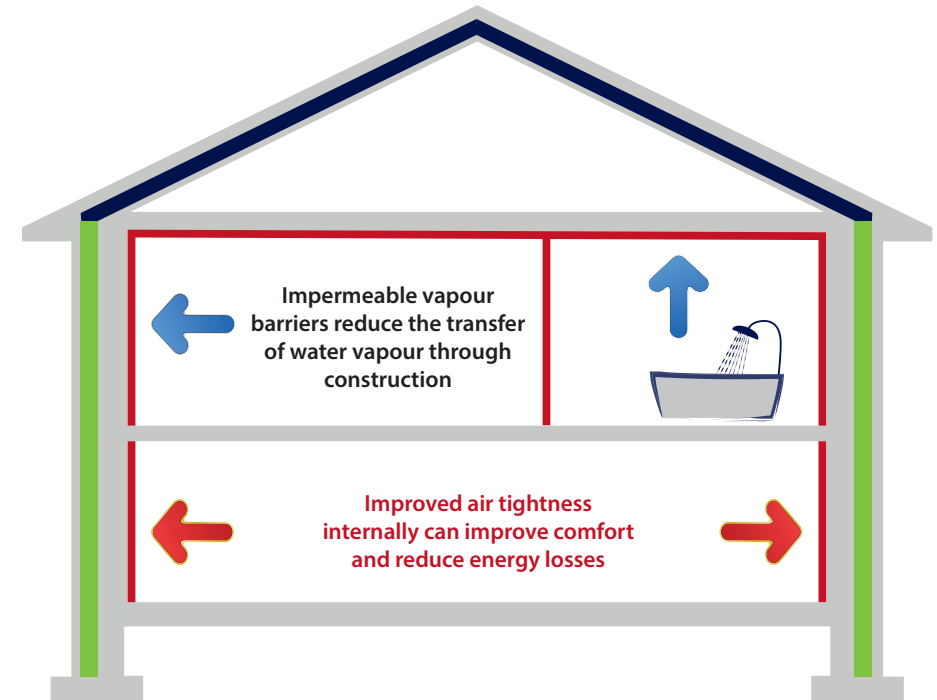

Installation Guidelines
www.donlow.co.uk/install



5 060098 740955 1 >



Don & Low Ltd, Glamis Road, Forfar, Angus, DD8 1FR, Scotland, UK
Sales Tel: +44(0)1307 452200 email: enquiries@donlow.co.uk
Technical Tel: 0808 169 4444 email: membranes@donlow.co.uk • www.donlow.co.uk



Code: 970
Issue 03
September 2024