

Don & Low Roofing Accessories

Plain Tile Vent

Datasheet

The Don & Low Plain Tile Vent boasts a 6,000mm² airflow and can be laid down to 35° roof pitch. Available in four colours.


Roof Ventilation	
Airflow	Space
5,000mm ²	1.2m Intervals at Ridge
10,000mm ²	0.6m Intervals at Eaves

Guidelines

To be fitted whilst laying the roof (can be retro fitted as well). The roof membrane needs to be cut to allow penetration into roof space. Cut an "X" into the membrane, folding back all 4 tabs, with the top envelope tab folded back and fixed over the top batten. Can be used with Plain Tile Adaptor DL3PTVA and Flexipipe DL3FP if connection required.

Specifications

	Plain Tile Vent	Plain Tile Adaptor	Flexipipe
Product Code	DL3PTV	DL3PTVA	DL3FP
Free Airflow	6,000mm ²	-	-
Weight	605g	425g	225g
Dimensions	330x330mm	285x240mm	110m
Material	Acrylonitrile Styrene Acrylate (ASA) and Polypropylene (PP)	Polypropylene (PP)	Polypropylene (PP)
Pcs / Carton	10	15	50
Cartons / Pallet	21	21	80
Manufacturing Process	Injection Moulding		-
Colours	Grey, Brown, Red, Terracotta	Black	Black
Regulations / Certifications	Compliant with all Relevant British Standards and Regulations		

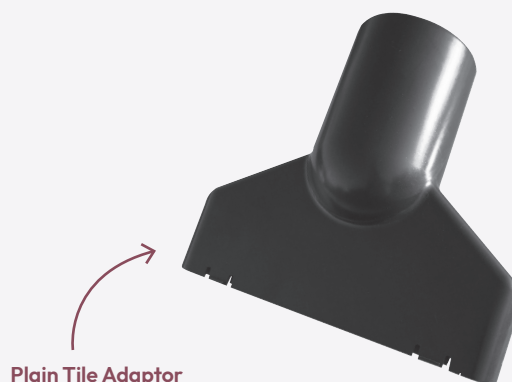

Construction Technical Services

 **0808 169 4444**

Don & Low Ltd, Glamis Road, Forfar, Angus, DD8 1FR, Scotland, UK
Tel: +44(0)1307 452200 Fax: +44 (0)1307 452201

Don & Low assumes no liability for written errors within this document.

15 YEAR
WARRANTY

All products are covered by 15 year Durability Warranty. Terms and conditions apply.

MADE IN THE UK 

All plastic products are made in the UK.