

Datasheet


The Don & Low Handed Dry Verge is designed to provide a mortar free and secure method of fixing concrete interlocking verge tiles while complying to BS5534. It provides a consistent appearance that requires no maintenance. The system is available in four colours to blend in with the roof line and fits concrete interlocking tiles, between 260–360mm batten gauge and tested to BS8612.

Guidelines

The Handed Dry Verge requires the Starter piece at the eaves. It is also available with compatible Half Round or Angled End Caps. Tile battens must be set out as per the fixing instructions and Verge units must be screw fixed.

Handed dry verge product codes on excel are DL2DVHR & DL2DVHL

Specifications			
	Handed Dry Verge	Dry Verge Universal Starter	Dry Verge End Cap
Product Code	DL2DVHR & DL2DVHL	DL2USGR	DL2ECR & DL2ECA
Weight	162g	50g	140g
Dimensions	420x150mm	115x127mm	240x260mm
Pcs / Carton	50	25	40
Cartons / Pallet	20	40	20
Material	Polypropylene (PP)		
Manufacturing Process	Injection Moulding		
Colours	Grey, Black, Brown, Terracotta, Red	Grey	Grey, Black, Brown, Terracotta, Red
Regulations / Certifications	Compliant with All Relevant British Standards and Regulations		

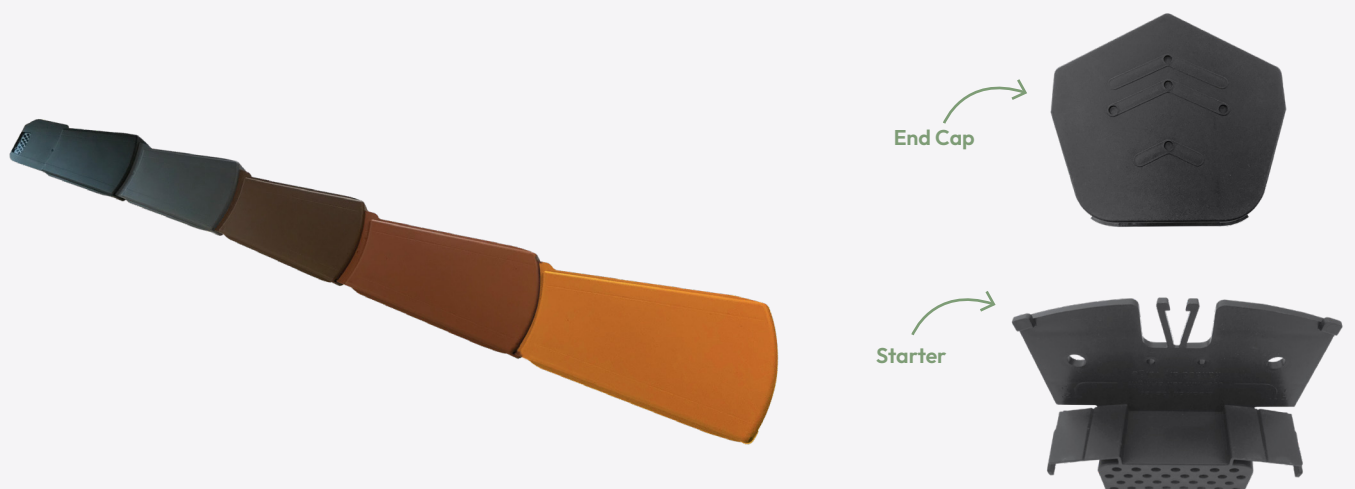

ISSUE DATE: DECEMBER 2025

Construction Technical Services

0808 169 4444

Don & Low Ltd, Glamis Road, Forfar, Angus, DD8 1FR, Scotland, UK
Tel: +44(0)1307 452200 Fax: +44 (0)1307 452201

Don & Low assumes no liability for written errors within this document.



All products are covered by 15 year Durability Warranty. Terms and conditions apply.



All plastic products are made in the UK.