

Ambi Dry Verge


Datasheet

The Don & Low Ambi Dry Verge is designed to provide a mortar free and secure method of fixing concrete interlocking verge tiles while complying to BS5534. As it isn't handed, it can be fitted on both sides of the roof. Ambi Dry Verge provides a consistent appearance that requires no maintenance. The system is available in five colours to blend in with the roof line and fits concrete interlocking tiles, between 260-355mm batten gauge and tested to BS8612.

Guidelines

The Ambi Dry Verge requires the Starter piece at the eaves. It is also available with compatible Half Round or Angled End Caps. Tile battens must be set out as per the fixing instructions and Verge units must be screw fixed.

Specifications			
	Ambi Dry Verge	Dry Verge Universal Starter	Dry Verge End Cap
Product Code	DL2DVA	DL2DVAS	DL2ECR & DL2ECA
Weight	162g	49g	140g
Dimensions	417x170mm	105x152mm	240x260mm
Pcs / Carton	40	50	40
Cartons / Pallet	20	40	20
Material	Polypropylene (PP)		
Manufacturing Process	Injection Moulding		
Colours	Grey, Black, Brown, Terracotta, Red		
Regulations / Certifications	Compliant with All Relevant British Standards and Regulations		

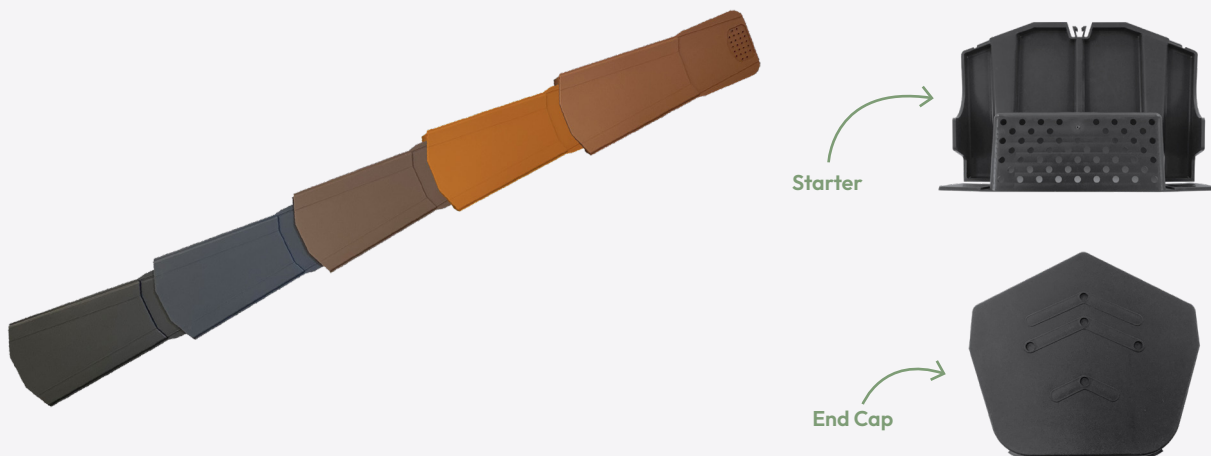

Construction Technical Services

 **0808 169 4444**

Don & Low Ltd, Glamis Road, Forfar, Angus, DD8 1FR, Scotland, UK
Tel: +44(0)1307 452200 Fax: +44 (0)1307 452201

Don & Low assumes no liability for written errors within this document.

15 YEAR
WARRANTY

All products are covered by 15 year Durability Warranty. Terms and conditions apply.

MADE IN THE UK 

All plastic products are made in the UK.