


# MultiTX<sup>®</sup> PRO

1m x 45m

## Vapour / air barrier high resistance underlay

- Modern alternative to traditional bituminous based (type 1F) roofing felts
- Excellent low temperature flexibility
- Lightweight fabric minimises manual handling issues
- Resistant to water penetration and stabilised against UV degradation

Identification	Product		Manufacturer	Website www.donlow.co.uk
<b>BAB145</b>	<b>MultiTX<sup>®</sup> PRO</b>		<b>Don &amp; Low Ltd</b>	
Batten gauge	Declared wind uplift resistance, PD (Pa) (untaped overlaps)	Declared wind uplift resistance, PD (Pa) (taped overlaps)	Zone suitability	
≤345mm	1,386	3,067	1 to 5 (Important: overlaps require taping in Zone 5)*	
≤250mm	3,318	NO taping required	1 to 5	
≤100mm	>1,600	NO taping required	1 to 5	

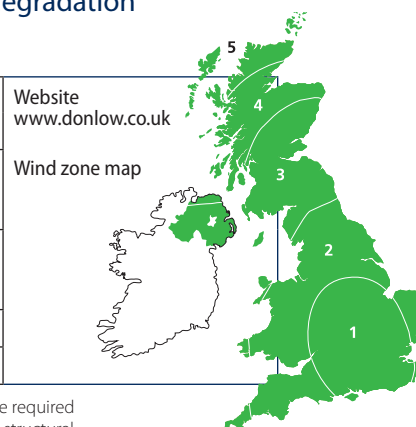

**NOTE 1:** In the table above, green indicates that the zone is suitable and light grey indicates that it is not suitable.

**NOTE 2:** Zone suitability applies only for underlays in applications where a well-sealed ceiling is present, ridge height is not greater than 15m, roof pitch is between 12.5° and 70°, site altitude is not greater than 100m, and no significant site topography is present. Other applications might require underlays with greater wind uplift and it is advisable to seek professional advice.

**NOTE 3:** Zones 3 and 4 apply to Northern Ireland.

**\*NOTE 4:** Taping of overlaps should be undertaken in accordance with the installation instructions available on our website. Don & Low can also supply a suitable double sided overlap tape, if required.

### Additional Wind Uplift Performance Information in Other Roof Configurations

**Counter Battens:** There is no need to tape joints where counter battens are used. Where softwood boarding or timber sheeting is used below the underlay, counter battens are typically required to provide effective drainage below the battens. Where timber battens are positioned above the underlay, there is no need to tape overlaps to resist wind uplift. Independent testing has established that, where counter battens are used, the wind uplift performance of the underlay (with untaped laps) exceeds the requirements of all UK wind zones.

**Battens exceeding 25mm:** There is no need to tape joints where 38mm battens are used. BS 5534 (Table 3) recommends minimum batten sizes, typically 25mm deep, for different applications. However, deeper (38mm) battens

may be required by the structural designer. Independent testing has established that, where deeper, 38mm battens are used, the wind uplift performance of the underlay (with untaped laps) exceeds the requirements of all UK wind zones.

**Slates Nailed Directly onto Sarking:** There is no need to tape joints where natural slate is nailed directly into timber sarking. It is common practice in Scotland, and some rural areas of England, to nail natural slates directly to sarking or underlay boarding, without battens/counter battens. Independent testing has established that, where slates are nailed directly into timber sarking, the wind uplift performance of the underlay (with untaped laps) exceeds the requirements of all UK wind zones.



Installation Guidelines  
www.donlow.co.uk/install



5 060098 741143



**Don & Low Ltd**  
Newfordpark House Glamis Road Forfar Angus DD8 1FR Scotland UK  
HOTLINE: 0800 169 4444, t +44 (0)1307 452200, e enquiries@donlow.co.uk www.donlow.co.uk



**Code: 989**  
**Issue 01**  
**April 2024**